



Spec Sheet

Specifications		WT51280
Nominal Voltage		51.2V
Nominal Capacity		280Ah
Battery Energy		14.33KWh
Voltage Range		44.8-56V
Charge Voltage Range		56-57.6V
Recommend Charge Current		100A
Max Charge Current		200A
Max Discharge Current		200A
Communication		
Display		LCD display screen/touch screen display screen
Communication		RS232、RS485、CAN (Wifi Optional)
General Specification		
Dimension		500x233x810mm
Weight(kg)		116.8kg
Communication Port		RS485、CAN
Display		LED+LCD
Terminal		Plug-in
Compatible inverter		Growatt, Goodwe, Sol-Ark, SRNE, DEYE
Environment Parameter		
Humidity		5-95% RH
Charge Temperature Range		0-45°C
Discharge Temperature Range		-20-60°C
Storage Temperature Range		-20-45°C
Service Life		
Cycle Life		>6000 (0.5C@ 25°C, 80% DOD)
Design Life		15Year
Certification		CE,EMC,UN38.3

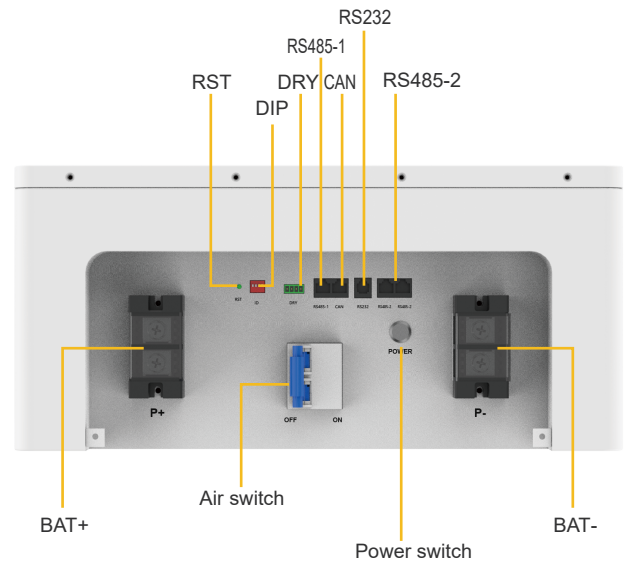

Color Options

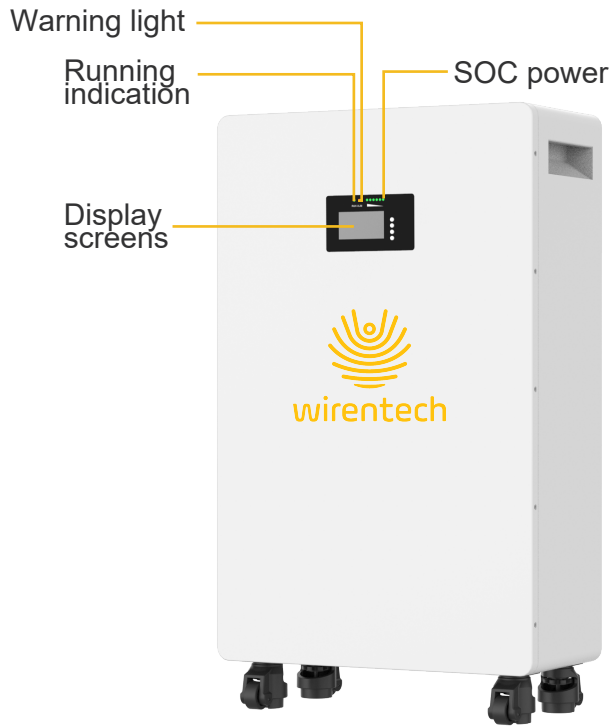